



EMOS®

A brand of Legrand



LIGHTING

FIRST AID FOR THE GARDEN

POWER SUPPLY AND CONNECTION

AUTOMATION AND SAFETY

Garden products catalogue

Making Life Easy





02



LIGHTING



1. Garden lights

03



2. Solar floodlights

15



3. Orientation lights


22



4. Decorative lights

24

32



POWER SUPPLY AND CONNECTION



1. Cable reels

33



2. Extension cords


37



3. Outdoor sockets

39

41



AUTOMATION AND SAFETY



1. Timers

42



2. Motion sensors

45



3. Water timers

47



4. Doorbells

49



5. Cameras


54



6. Valve closers

58

60



FIRST AID FOR THE GARDEN



1. Tapes

61





We offer a solution for every situation - from practical garden lighting, to eco-friendly solar floodlights, to precision-engineered orientation lighting for added safety and decorative lighting that adds a unique design element to your exterior. Our products combine state-of-the-art technology with quality materials to ensure reliable operation and long life in all conditions. Whether you want to highlight architectural features, illuminate pathways or create a pleasant atmosphere, our lighting is the right choice for your garden or patio.

LIGHTING

1. Garden lights
2. Solar floodlights
3. Orientation lights
4. Decorative lights



GARDEN LIGHTS


Turn your garden into a magical oasis with our exclusive garden lighting. Discover a wide range of wall and recessed lights in different shapes and designs to add a unique charm to your garden. The elegant anthracite or black colour blends perfectly with any exterior, creating a harmonious and stylish look. Create the perfect night-time atmosphere and enjoy the beauty of your garden even after dark.

Garden lights with replaceable light source



LANA series

- 2 wall lights and 2 pole lights
- E27 bulb (not included)
- solid aluminium body in anthracite colour
- durable plastic diffuser
- highly waterproof and dustproof
- suitable for driveways, garages and house facades

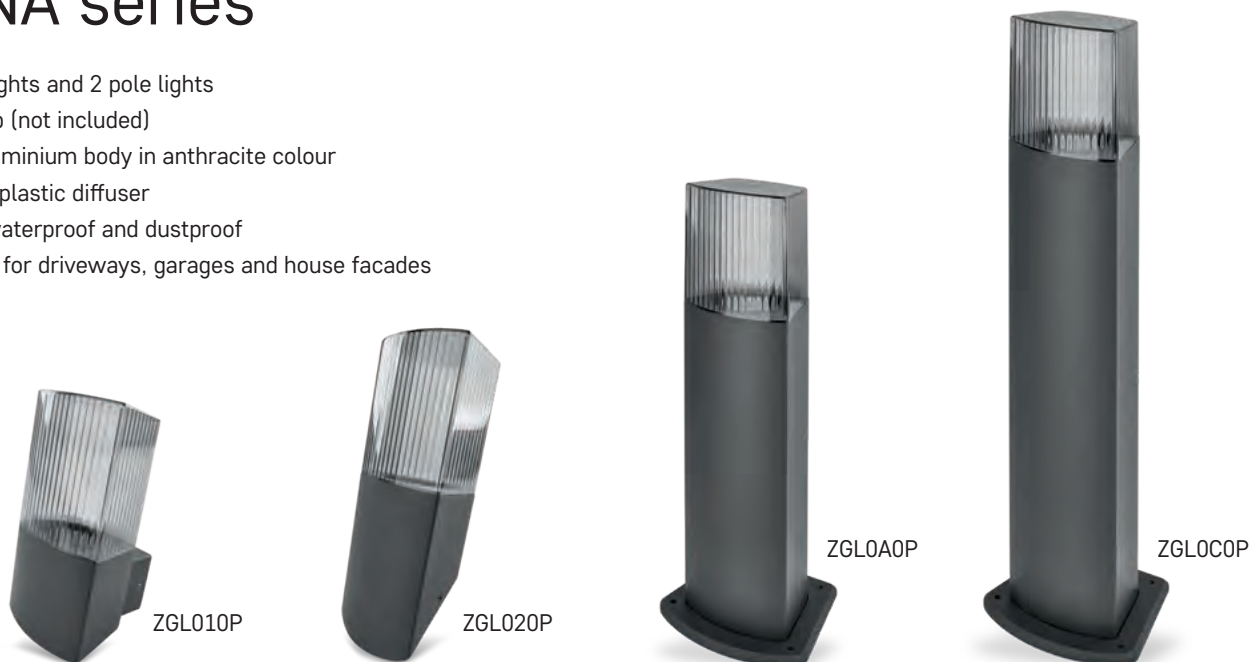

General number	EAN	Bulb (not included)	Colour	Dimension in mm	Protection	Power supply	Body material	Diffuser material	Fixing	Daylight sensor
ZGL010P	8592920143827	E27	anthracite	119 × 106 × 218	IP54	230 V AC	aluminium	plastic	wall mounted	-
ZGL020P	8592920143841	E27	anthracite	106 × 88 × 285	IP54	230 V AC	aluminium	plastic	wall mounted	-
ZGL0A0P	8592920143865	E27	anthracite	154 × 133 × 450	IP54	230 V AC	aluminium	plastic	pole	-
ZGL0C0P	8592920143889	E27	anthracite	154 × 133 × 750	IP54	230 V AC	aluminium	plastic	pole	-



SALVIA series

- 1 wall and 1 pendant light
- E27 bulb (not included)
- steel body in black colour
- modern wire design
- plastic diffuser
- suitable for terraces, pergolas, house facades




ZGD010P



ZGD070P

General number	EAN	Bulb (not included)	Colour	Dimension in mm	Protection	Power supply	Body material	Diffuser material	Fixing	Daylight sensor
ZGD010P	8592920143209	E27	black	208 × 160 × 285	IP44	230 V AC	steel	plastic	wall mounted	-
ZGD070P	8592920143223	E27	black	160 × 160 × 760	IP44	230 V AC	steel	plastic	hanging	-

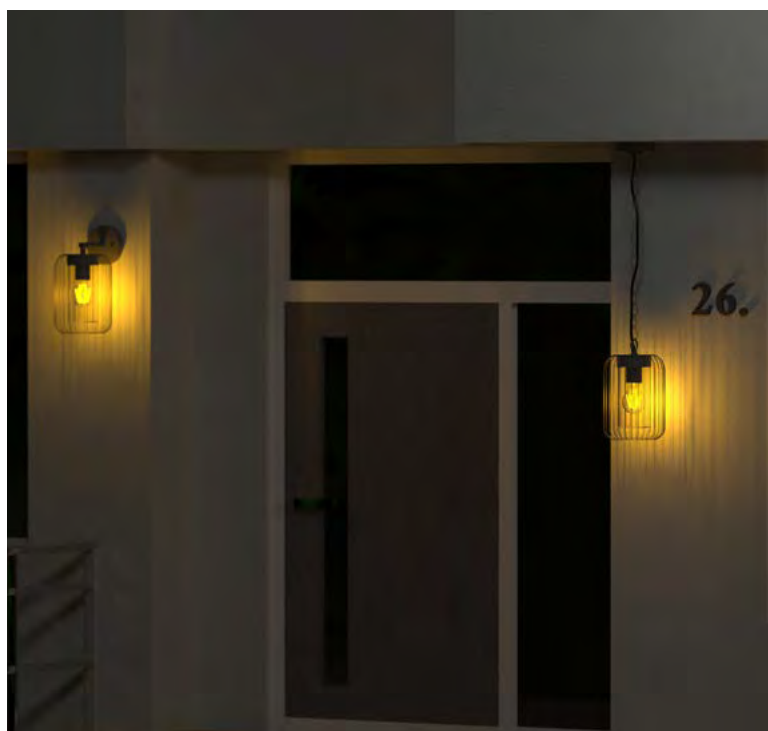

ARTEO series

- 3 wall and 2 pole lights
- 1 wall light in PIR sensor version
- E27 bulb (not included)
- stainless steel body in anthracite colour
- elegant plastic diffuser
- suitable for gardens, terraces, driveways and building facades



General number	EAN	Bulb (not included)	Colour	Dimension in mm	Protection	Power supply	Body material	Diffusor material	Fixing	Daylight sensor
ZGA010P	8592920143247	E27	anthracite	164 × 120 × 230	IP44	230 V AC	stainless steel	plastic	wall mounted	-
ZGA020P	8592920143261	E27	anthracite	120 × 120 × 330	IP44	230 V AC	stainless steel	plastic	wall mounted	-
ZGA040P	8592920143285	E27	anthracite	164 × 120 × 295	IP44	230 V AC	stainless steel	plastic	wall mounted	yes
ZGA0A0P	8592920143308	E27	anthracite	120 × 120 × 500	IP44	230 V AC	stainless steel	plastic	pole	-
ZGA0C0P	8592920143322	E27	anthracite	120 × 120 × 800	IP44	230 V AC	stainless steel	plastic	pole	-



ADENIA series

- 3 wall lights
- 1 wall light in PIR sensor version
- E27 bulb (not included)
- modern aluminium body in black colour
- plastic diffuser with lantern look
- suitable for walls, terraces and building facades



General number	EAN	Bulb (not included)	Colour	Dimension in mm	Protection	Power supply	Body material	Diffusor material	Fixing	Daylight sensor
ZGB010P	8592920143346	E27	black	198 × 150 × 278	IP44	230 V AC	aluminium	plastic	wall mounted	-
ZGB020P	8592920143360	E27	black	180 × 150 × 245	IP44	230 V AC	aluminium	plastic	wall mounted	-
ZGB040P	8592920143384	E27	black	198 × 150 × 298	IP44	230 V AC	aluminium	plastic	wall mounted	yes




ZALA series

- 2 wall and 1 column light
- 1 wall light in PIR sensor version
- E27 bulb (not included)
- oval stainless steel body in anthracite colour
- plastic diffuser
- suitable for building facades, driveways, garden paths



General number	EAN	Bulb (not included)	Colour	Dimension in mm	Protection	Power supply	Body material	Diffuser material	Fixing	Daylight sensor
ZGC010P	8592920143407	E27	anthracite	128 × 80 × 230	IP44	230 V AC	stainless steel	plastic	wall mounted	-
ZGC040P	8592920143421	E27	anthracite	128 × 80 × 270	IP44	230 V AC	stainless steel	plastic	wall mounted	yes
ZGC0A0P	8592920143445	E27	anthracite	140 × 140 × 500	IP44	230 V AC	stainless steel	plastic	pole	-

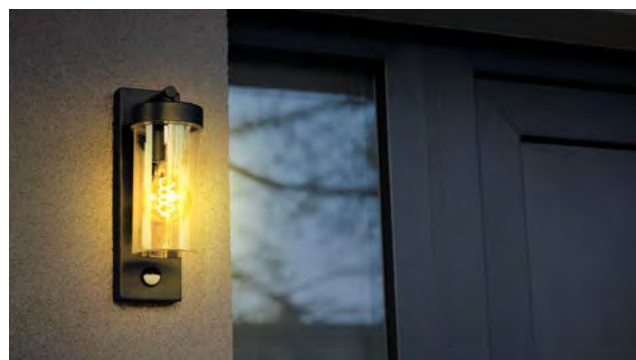

MALVA series

- 2 wall lights
- 1 wall light with integrated PIR sensor
- E27 bulb (not included)
- aluminium body frame in black colour
- rectangular plastic diffuser
- suitable for modern building facades



ZGH010P



ZGH040P

General number	EAN	Bulb (not included)	Colour	Dimension in mm	Protection	Power supply	Body material	Diffusor material	Fixing	Daylight sensor
ZGH010P	8592920143605	E27	black	130 × 120 × 250	IP44	230 V AC	aluminium	plastic	wall mounted	-
ZGH040P	8592920143629	E27	black	130 × 120 × 280	IP44	230 V AC	aluminium	plastic	wall mounted	yes



TILLIA series

- 1 wall light
- E27 bulb (not included)
- aluminium body frame in black colour
- oval plastic diffuser
- suitable for modern building facades



General number	EAN	Bulb (not included)	Colour	Dimension in mm	Protection	Power supply	Body material	Diffusor material	Fixing	Daylight sensor
ZGI010P	8592920143643	E27	black	128 × 110 × 270	IP44	230 V AC	aluminium	plastic	wall mounted	-





CASSIA series



- the series includes 1 wall light
- E27 bulb (not included)
- oval aluminium body in anthracite colour
- glass diffuser
- suitable for building facades



General number	EAN	Bulb (not included)	Colour	Dimension in mm	Protection	Power supply	Body material	Diffusor material	Fixing	Daylight sensor
ZGG010P	8592920143582	E27	anthracite	126 × 95 × 222	IP44	230 V AC	aluminium	glass	wall mounted	-

OCULUS series



- 2 wall lights
- 1 or 2 bulbs with GU10 socket (not included)
- solid plastic body in black colour
- modern, minimalist look for all building facades



General number	EAN	Bulb (not included)	Colour	Dimension in mm	Protection	Power supply	Body material	Diffusor material	Fixing	Daylight sensor
ZGF010P	8592920143544	GU10	black	88 × 67 × 80	IP44	230 V AC	plastic	plastic	wall mounted	-
ZGF020P	8592920143568	GU10	black	88 × 67 × 153	IP44	230 V AC	plastic	plastic	wall mounted	-

Garden lights with integrated light source



NIKA series

- 2 wall and 2 pole lights
- warm white LED light
- 1 wall light with integrated PIR sensor
- pole lights that can be installed to the ground
- aluminium body in anthracite colour
- plastic square diffuser
- joint for turning the diffuser
- luminous flux 900 lm



General number	EAN	Colour	Dimension in mm	Protection	Power supply	Power	Body material	Diffuser material	Fixing	Daylight sensor
ZGE014L	8592920143469	anthracite	120 × 120 × 200	IP44	230 V AC	12,5 W	aluminium	plastic	wall mounted	-
ZGE044L	8592920143483	anthracite	120 × 120 × 200	IP44	230 V AC	12,8 W	aluminium	plastic	wall mounted	yes
ZGE0A4L	8592920143506	anthracite	120 × 120 × 500	IP44	230 V AC	12,5 W	aluminium	plastic	pole	-
ZGE0C4L	8592920143520	anthracite	120 × 120 × 800	IP44	230 V AC	12,5 W	aluminium	plastic	pole	-



Solar powered garden lighting



TERION series

- 1 wall and 2 column lights
- the whole series with integrated PIR sensor
- solar powered without the need for mains connection
- warm white colour of the integrated light source
- solid metal body
- plastic diffuser
- lasts all night when fully charged



General number	EAN	Colour	Dimension in mm	Protection	Power supply Li-Ion battery	Photovoltaic panel	Body material	Diffuser material	Fixing	Daylight sensor
ZGJ044S	8592920143667	anthracite	147 × 125 × 146	IP44	3,7 V / 1 200 mAh	0,88 W	stainless steel	plastic	wall mounted	yes
ZGJOB4S	8592920143681	anthracite	125 × 125 × 500	IP44	3,7 V / 1 200 mAh	0,88 W	stainless steel	plastic	pole	yes
ZGJ0F4S	8592920143100	anthracite	125 × 125 × 805	IP44	3,7 V / 1 200 mAh	0,88 W	stainless steel	plastic	pole	yes



VEREA series

- 1 wall and 1 column lights
- the whole series with integrated PIR sensor
- warm white colour of the integrated light source
- pole lights that can be installed to the ground
- high-efficient solar power without the need for mains connection
- solid modern aluminium body in black colour
- lasts all night when fully charged




ZGK044S



ZGK0B4S

General number	EAN	Colour	Dimension in mm	Protection	Power supply Li-Ion battery	Photovoltaic panel	Body material	Diffuser material	Fixing	Daylight sensor
ZGK044S	8592920143711	black	107 × 154 × 130	IP44	3,7 V / 2 200 mAh	2,1 W	aluminium	plastic	wall mounted	yes
ZGK0B4S	8592920143735	black	107 × 154 × 500	IP44	3,7 V / 2 200 mAh	2,1 W	aluminium	plastic	pole	yes

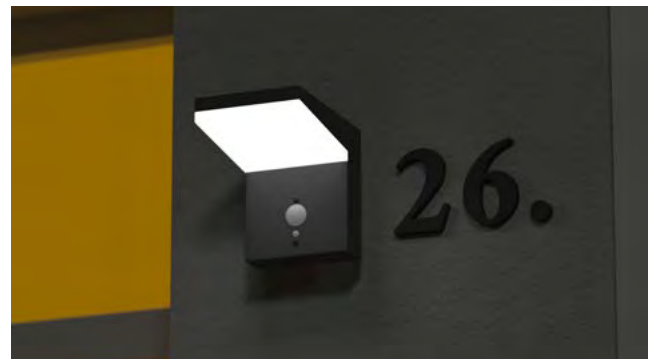



SOLAR FLOODLIGHTS

Designed to provide reliable and energy efficient lighting for your garden. Thanks to the solar power supply, you don't need any cables or electrical connections, which makes installation easier and saves energy. Modern design and sleek colours ensure that our floodlights not only look great, but can also withstand tough outdoor conditions. Enjoy the beauty of your garden even after dark, knowing that you are contributing to the environment.

SUNNO series

- built-in PIR sensor for motion detection
- no mains power consumption
- 3 light modes
- IP54 providing reliable protection against dust and splash water
- flexible positioning - the floodlight can be placed in the shadow while the solar panel can be placed on the sunny side thanks to a 1.8 m long cable
- motion PIR sensor with a range of up to 6 metres



ZG112S

General number	EAN	Light colour	Dimension in mm	Luminous flux	Body material	Diffuser material	CCT	Beam angle	Detection angle	Sensor range
ZG112S	8592920132524	neutral white	181 × 180 × 70	1 300 lm	plastic (ABS+ PC)	plastic (PC)	4 000 K	100°	120°	6 m





SOLO series



- built-in PIR sensor for motion detection
- no mains power consumption
- 3 light modes
- IP54 providing reliable protection against dust and humidity
- easy installation
- for illumination of driveways, gardens or small car parks



ZG121S



ZG122S

General number	EAN	Light colour	Dimension in mm	Luminous flux	Body material	Diffuser material	CCT	Beam angle	Detection angle	Sensor range
ZG121S	8592920132548	neutral white	145 × 136 × 26	1 000 lm	plastic (ABS+ PC)	plastic (PC)	4 000 K	100°	120°	6 m
ZG122S	8592920132562	neutral white	190 × 184 × 28	1 600 lm	plastic (ABS+ PC)	plastic (PC)	4 000 K	100°	120°	6 m



SPILO series

- control via remote control
- built-in PIR sensor for motion detection
- no mains power consumption
- wall mounted installation or into the ground thanks to the spike
- ideal for lighting around the house, garden paths, fountains or trees



ZG131S / ZG132S



General number	EAN	Light colour	Dimension in mm	Luminous flux	Body material	Diffuser material	CCT	Beam angle	Detection angle	Sensor range
ZG131S	8592920132586	warm white	180 × 146 × 122	1 500 lm	plastic (ABS+ PC)	plastic (PC)	3 000 K	110°	120°	6 m
ZG132S	8592920132609	neutral white	180 × 146 × 122	1 500 lm	plastic (ABS+ PC)	plastic (PC)	4 000 K	110°	120°	6 m



LUNIS series

- built-in PIR sensor for motion detection
- water and dust resistant IP65
- no mains power consumption
- hook for hanging
- ideal for lighting stairways, along walkways and driveways or pergolas



ZG151S

General number	EAN	Light colour	Dimension in mm	Luminous flux	Body material	Diffuser material	CCT	Beam angle	Detection angle	Sensor range
ZG151S	8592920132623	neutral white	139 × 104 × 70	220 lm	plastic (ABS+ PC)	plastic (PC)	4 000 K	120° × 60°	120°	6 m



BRIXO series

- built-in PIR sensor for motion detection
- no mains power consumption
- 2 light modes
- IP65 protection guarantees resistance to water and dust
- ideal for permanent outdoor lighting



ZG161S



ZG162S



ZG165S



ZG166S

General number	EAN	Light colour	Dimension in mm	Luminous flux	Body material	Diffuser material	CCT	Beam angle	Detection angle	Sensor range
ZG161S	8592920132647	neutral white	138 × 90 × 35	350 lm	plastic (ABS+ PC)	plastic (PC)	4 000 K	140° × 70°	120°	6 m
ZG162S	8592920132661	neutral white	138 × 90 × 35	350 lm	plastic (ABS+ PC)	plastic (PC)	4 000 K	140° × 70°	120°	6 m
ZG165S	8592920132685	neutral white	230 × 97 × 43	900 lm	plastic (ABS+ PC)	plastic (PC)	4 000 K	140° × 70°	120°	7 m
ZG166S	8592920132708	neutral white	230 × 97 × 43	900 lm	plastic (ABS+ PC)	plastic (PC)	4 000 K	140° × 70°	120°	7 m





LUMI series





- built-in PIR sensor for motion detection
- no mains power consumption
- 2 light modes
- IP54 protection guarantees water and dust resistance
- ideal for permanent outdoor lighting



ZG172S

General number	EAN	Light colour	Dimension in mm	Luminous flux	Body material	Diffuser material	CCT	Beam angle	Detection angle	Sensor range
ZG172S	8592920132722	neutral white	105 × 130 × 80	240 lm	plastic (ABS+ PC)	plastic (PC)	4 000 K	120°	120°	5 m

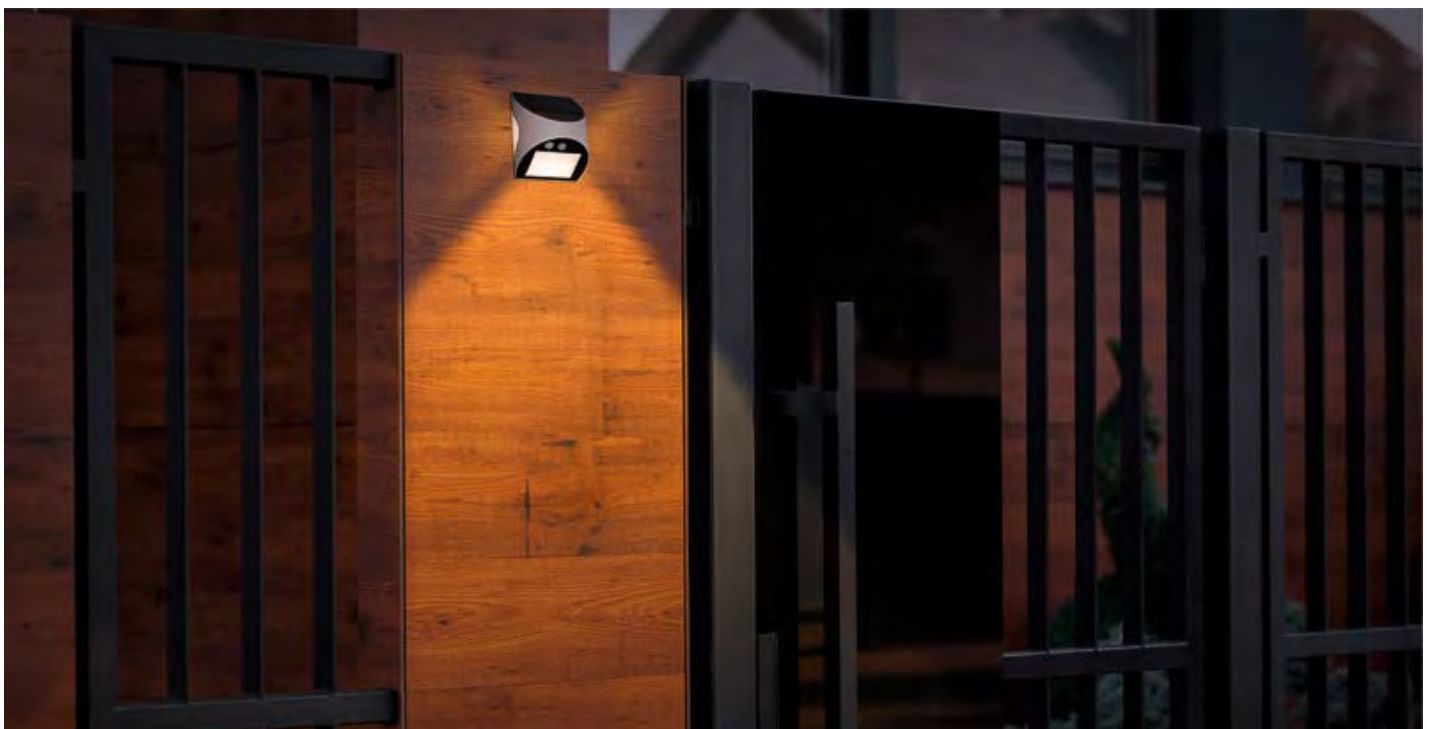

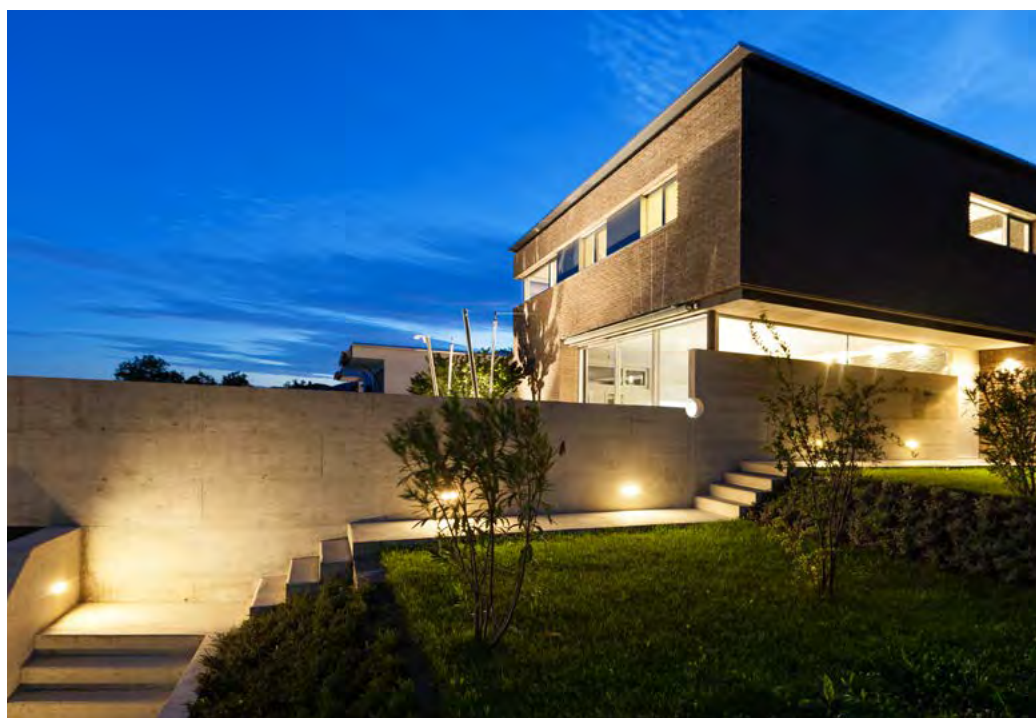

ORIENTATION LIGHTING

In the Orientation Lights category you will find unique solutions that not only enhance safety but also elegantly define key points of your interior and exterior. All products are designed to reliably illuminate entrances, walkways, parking lots and other strategically important locations, making it easier to navigate in the dark and contributing to the overall safety of the area.


3

AMAL series

- minimal power consumption
- IP65 protection guarantees water resistance
- for recessed mounting
- superior durability thanks to high quality materials
- in neutral or warm white light colour
- for use in domestic and industrial areas, for lighting staircases, exterior facades, walls, etc.



ZC0108
ZC0110

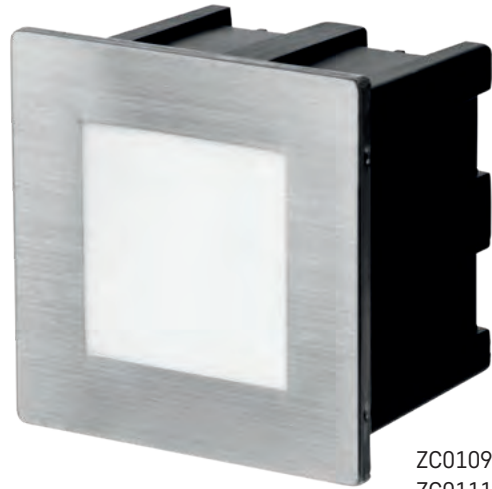

ZC0109
ZC0111

General number	EAN	Light colour	CCT	Dimension in mm	Luminous flux	Body material	Diffuser material	Power	Light efficiency
ZC0108	8592920037348	warm white	3 000 K	123 × 53 × 61	60 lm	aluminium	glass	1,5 W	37 lm/W
ZC0109	8592920037355	warm white	3 000 K	80 × 80 × 61	65 lm	aluminium	glass	2 W	50 lm/W
ZC0110	8592920054789	neutral white	4 000 K	123 × 53 × 61	65 lm	aluminium	glass	2 W	37 lm/W
ZC0111	8592920054796	neutral white	4 000 K	80 × 80 × 61	65 lm	aluminium	glass	2 W	50 lm/W






DECORATIVE LIGHTS

An original range of products that transform your outdoor space into a light theatre full of magic and energy. Our decorative lights are selected to create an unmistakable atmosphere of celebrations, parties and joyful gatherings where light becomes not only a source of illumination but also a distinctive design element.

LED solar decorative lighting



- low cost operation
- stylish design
- for indoor and outdoor use
- long service life
- year-round use

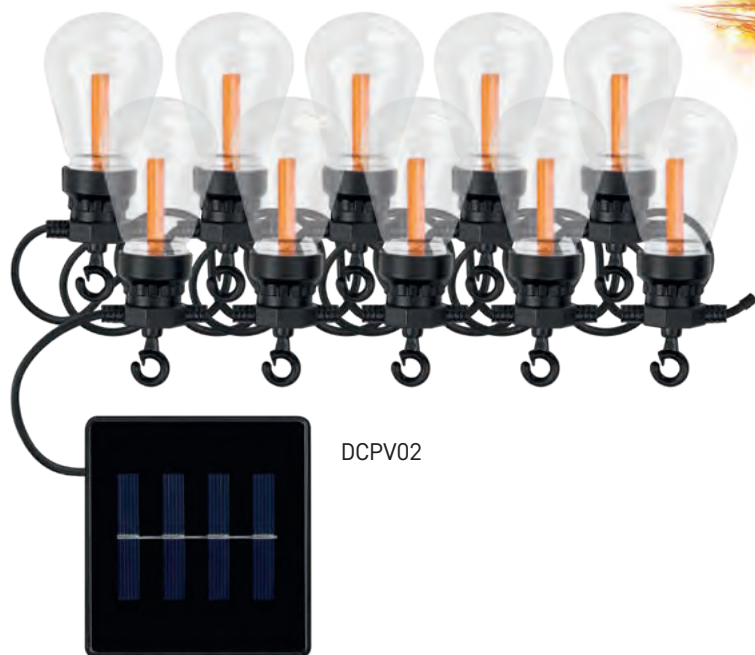

DCPV02



D3ZW01



D3ZC01

General number	EAN	Light	Timer	Dimension	Cable length	Wire colour	Number of LEDs	Material	Power
D3ZW01	8592920135280	warm white	yes	12 m	3 m	copper	120	metal	2,4 W
D3ZC01	8592920135303	cold white	yes	12 m	3 m	silver	120	metal	2,4 W
DCPV02	8592920135242	vintage	-	4,5 m	0,5 m	black	10	plastic	0,6 W



Party bulbs decorative chains



- designer party bulbs in different colours and styles
- compact design and long enough supply cables for easy installation
- universal power supply (mains adapter)
- equipped with long-life, low-power LED sources



DCPW01



DCPV01



DCPC08



DCPM01



DCPW04



DCPW07

General number	EAN	Light colour	Dimension of the light part of the chain	Cable length	Power supply	Number of LEDs	Power	Output voltage
DCPW01	8592920093207	warm white	5 m	5 m	AC adapter	50	5 W	24 V DC
DCPV01	8592920099070	vintage	4,5 m	5 m	AC adapter	100	5 W	5 V DC
DCPC08	8592920110805	cold white	4,5 m	5 m	AC adapter	10	5 W	5 V DC
DCPM01	8592920094013	multicolor	5 m	5 m	AC adapter	50	6 W	24 V DC
DCPW04	8592920099551	warm white	7,6 m	5 m	AC adapter	16	6 W	24 V DC
DCPW07	8592920110829	warm white	7,6 m	5 m	AC adapter	20	6 W	30 V DC



GoSmart LED light chain

- colourful light bulbs and the chain itself
- lights to the beat of the music
- 16 million RGB colours
- long lifetime
- year-round use
- dimmable



ZIW17FR



practical hook for hanging



General number	EAN	Number of segments	Light colour	Body colour	Material	Cable length	Protection	Power
ZIW17FR	8592920136973	15	RGB	black	plastic	1,5 m	IP65	12 W



GoSmart Spot Light


- starter kit (4 pcs) and expansion kit (1 pcs), maximum expansion up to 8 pcs
- outdoor spot lights for intense illumination of a specific point, ideal for lighting up a garden, driveway or dark corner
- programmable RGBIC+CCT, each spot light can shine a different colour according to the settings in the app, dimmable
- gap between each light is 3 m
- power supply is included only in the starter kit (ZIW194R)



ZIW194R



ZIW191R

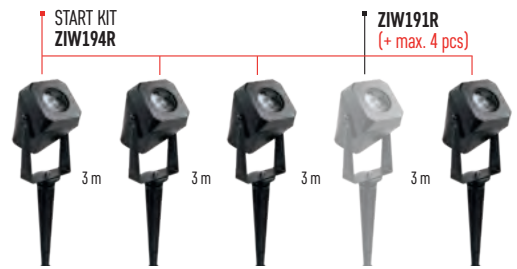

General number	EAN	Light colour	Luminous flux	Protection	Cable length	Body colour	Number of segments	Material	Power
ZIW194R	8592920136898	warm white-cold white	400 lm	IP65	1,5 m	black	4	plastic	7 W
ZIW191R	8592920136911	warm white-cold white	100 lm	IP65	1,5 m	black	1	plastic	1,5 W



GoSmart Outdoor floodlight


- starter kit (3 pcs) and expansion kit (1 pcs), maximum expansion up to 6 floodlights
- outdoor floodlights suitable for illuminating house, garden, pergola, wall etc.
- setup and control via mobile app
- programmable RGBIC+CCT, each floodlight can shine a different colour according to the settings in the app, dimmable
- milky diffuser for a more pleasant atmosphere
- flexible positioning - using the bracket or the spike included in the package
- power supply included in the starter kit only (ZIW184R)



ZIW184R



ZIW181R

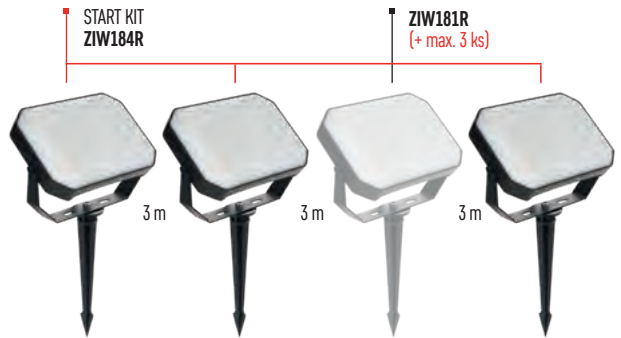


General number	EAN	Light colour	Luminous flux	Protection	Cable length	Body colour	Number of segments	Material	Power
ZIW181R	8592920136959	warm white-cold white	330 lm	IP65	1,5 m	black	1	plastic	4 W
ZIW184R	8592920136935	warm white-cold white	990 lm	IP65	1,5 m	black	3	plastic	14 W



GoSmart LED floodlights

- RGB+CCT, dimmable
- 20 W and 50 W power
- can be automated with other GoSmart products
- compatible with Amazon Alexa and Google Assistant voice assistants
- suitable for illuminating smaller buildings, shop fronts, driveways, garden landmarks, architecture, nightclubs or tree avenues

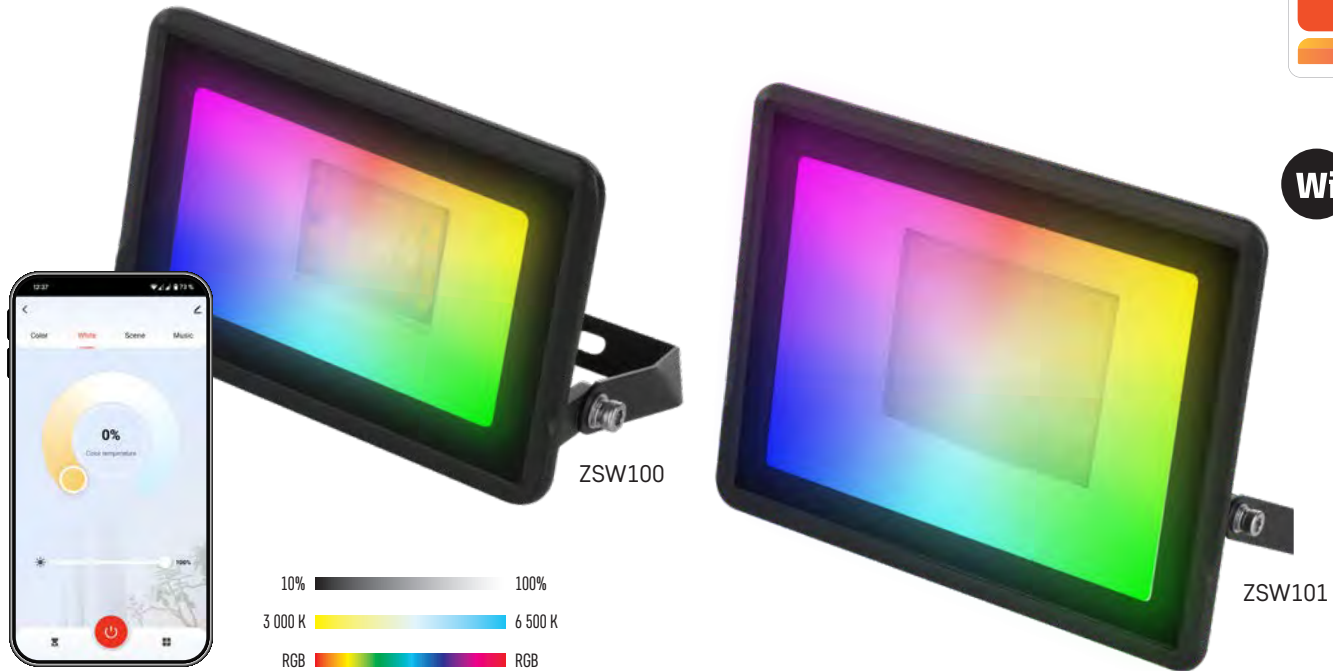

General number	EAN	Light colour	Dimension in mm	Luminous flux	Body material	Diffuser body	CCT	Beam angle	Dimming
ZSW100	8592920133781	warm white-cold white	157 × 56 × 101	1 720 lm	aluminium	glass	3 000-6 500 K	120°	yes
ZSW101	8592920133804	warm white-cold white	195 × 57 × 152	4 300 lm	aluminium	glass	3 000-6 500 K	120°	yes



Outdoor table lamps



- outdoor weatherproof with IP44
- low energy consumption and long lifetime
- convenient power supply or recharging via USB cable
- colour temperature selectable on most models
- stable and durable construction



General number	EAN	Name	Dimension in mm	Colour	Light colour	Material	Luminous flux	Power supply	Power
Z7630W	8592920122488	KATIE	330 × 130 × 150	white	warm/neutral/cold white	plastic	250 lm	5 V/1 A	4 W
Z7630B	8592920122471	KATIE	330 × 130 × 150	black	warm/neutral/cold white	plastic	250 lm	5 V/1 A	4 W
Z7633	8592920137710	JASON	270 × 130	black	warm/neutral/cold white	ABS plastic	180 lm	USB	2,2 W
Z7634	8592920137734	GRACE	350 × 130	black	neutral white	plastic + metal	80 lm	USB	4,2 W





Our range of cable reels, extension cords and connectors is ideal for anyone who needs a reliable and quality solution for connecting electrical equipment in the garden and at home. Cable reels with extension cords make it easy and safe to extend the reach of electrical sockets, perfect for working in the garden, maintaining the lawn or hosting outdoor events. Extension cords of different lengths and types provide flexibility and convenience when using electrical equipment in different locations. The connectors then allow cables to be connected securely and tightly, which is essential to ensure a reliable power supply. Our products combine high quality, durability and safety, making them the ideal choice for every gardener and DIY enthusiast.


POWER SUPPLY AND CONNECTION

1. Cable reels
2. Single socket extension cords
3. Outdoor sockets



CABLE REELS

Find reliable solutions for a safe and organized arrangement of power cables. Our reels combine robust construction with modern technology, ensuring long life and trouble-free operation even in harsh outdoor conditions. With easy handling and a practical design, our reels help you keep your cables organized and ready for immediate use in both home and professional environments.

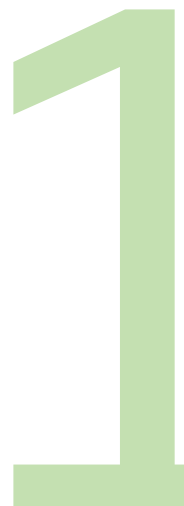

1-phase reels with neoprene cable

- quality neoprene insulation for maximum durability and reliability
- resistant to water, extreme temperatures and oils
- integrated thermal fuse increases safety and protects the cable from overheating during heavy use
- stable stand, winding reel and rubberised handle for comfortable handling and easy installation



P19222



P19223



P19224



P08215



-25 °C ~ +60 °C



Oil resistance



Impact resistance



IP44

General number	EAN	Length	Dimension in mm	Conductor cross-section	Number of sockets	Voltage	Current	Protection	Conductor	Cable colour	Other features
P19222	8592920096352	25 m	285	1,5 mm ²	4	230 V~	16 A	IP44	H07RN-F	black	guide eye, coil brake
P19223	8592920096369	50 m	285	1,5 mm ²	4	230 V~	16 A	IP44	H07RN-F	black	guide eye, coil brake
P19224	8592920096376	40 m	285	2,5 mm ²	4	230 V~	16 A	IP44	H07RN-F	black	guide eye, coil brake
P08215	8592920091821	15 m	247 × 157 × 310	1,5 mm ²	4	230 V~	13 A	IP44	H07RN-F	black	LED spotlight 20 W / 1.600 lm / 6.500 K

1-phase reels with rubber cable

- rubber insulation for maximum durability and reliability
- resistant to water, extreme temperatures and oils
- integrated thermal fuse increases safety and protects the cable from overheating during heavy use
- stable stand, winding reel and rubberised handle for comfortable handling and easy installation



P19625



P08225



P19221



P08250



P082251



General number	EAN	Length	Dimension in mm	Conductor cross-section	Number of sockets	Voltage	Current	Protection	Conductor	Cable colour	Other features
P19625	8592920016152	25 m	263,5	2,5 mm ²	4	230 V~	16 A	IP44	H05RR-F3G	black	-
P08250	8595025324931	50 m	300	1,5 mm ²	4	230 V~	16 A	IP44	H05RR-F3G	black	-
P19221	8592920056974	50 m	299	2,5 mm ²	4	230 V~	15 A	IP44	H05RR-F3G	black	-
P082251	8592920136379	25 m	200	1,0 mm ²	4	230 V~	10 A	IP44	H05RR-F3G	black	guide eye, coil brake
P08225	8595025324924	25 m	263,5	1,5 mm ²	4	230 V~	16 A	IP44	H05RR-F3G	black	-

3-phase reels with neoprene cable

- waterproof (IP44), extreme temperature and oil resistant
- EMOS extension lead with thermal fuse
- stable stand, winding reel and rubberised handle

P192250



P19733



General number	EAN	Length	Dimension in mm	Conductor cross-section	Number of sockets	Voltage	Current	Protection	Conductor	Cable colour	Other features
P192250	8592920025062	25 m	298	1,5 mm ²	1+2	230 V~/400 V~	13 A	IP44	H07RN-F5G	black	-
P19733	8592920091654	33 m	381	2,5 mm ²	1+2	230 V~/400 V~	15 A	IP44	H07RN-F5G	black	-

1-phase reels and single socket extension cords with weatherproof PVC cable

- highly weatherproof insulation guarantees reliable operation even at extremely low temperatures
- the cable is resistant to water (IP44), extreme temperatures and oils, ensuring its long-term functionality in harsh conditions
- thermal fuse for increased safety and overheating protection
- stable stand, winding reel and rubberised handle for easy handling and comfortable use
- one model with integrated LED reflector + 2 usb



-35 °C ~ +60 °C



Oil resistance



Impact resistance



IP44



P08620W



P08625W



P08650W



P01510W

P01520W

General number	EAN	Length	Dimension in mm	Conductor cross-section	Number of sockets	Voltage	Current	Protection	Conductor	Cable colour	Other features
P08620W	8592920123591	20 m	160 × 260 × 350	1,5 mm ²	3	230 V~	13 A	IP44	AT-N05V3V3-F	blue	2× USB-A Σ2,1 A max.
P08625W	8592920123577	25 m	263	1,5 mm ²	4	230 V~	16 A	IP44	AT-N05V3V3-F	blue	guide eye, coil brake
P08650W	8592920123553	50 m	320	1,5 mm ²	4	230 V~	16 A	IP44	AT-N05V3V3-F	blue	guide eye, coil brake
P01520W	8592920123676	20 m	-	1,5 mm ²	1	250 V~	16 A	IP44	AT-N05V3V3-F	blue	-
P01510W	8592920123652	10 m	-	1,5 mm ²	1	250 V~	16 A	IP44	AT-N05V3V3-F	blue	-



SINGLE SOCKET EXTENSION CORDS

In this category you will find a wide range of high quality single socket extension cords that ensure a strong, safe and reliable connection of power cables. Thanks to modern technology and precise workmanship, they guarantee a stable connection, which is essential for the flawless functionality of your system. Choose from our range of connectors that not only make installation easier, but also contribute to the efficient power supply and long-term reliability of your outdoor space.

Single socket extension cords with rubber insulation

- high-quality rubber cable ensures flexibility and durability even in harsh conditions
- available in different lengths for maximum flexibility in connection
- high load capacities up to 16 A / 3 680 W ideal for workshops, construction sites and gardens
- resistant to mechanical stress
- black colour, round socket with cover, children protection



P0701
P0702
P0703
P0704

General number	EAN	Length	Conductor cross-section	Number of sockets	Voltage	Current	Protection	Conductor	Cable colour	Children protection
P0701	8592920069820	10 m	1,5 mm ²	2	230 V~	16 A	IP44	H05RR-F3G	black	yes
P0702	8592920069837	15 m	1,5 mm ²	2	230 V~	16 A	IP44	H05RR-F3G	black	yes
P0703	8592920069844	20 m	1,5 mm ²	2	230 V~	16 A	IP44	H05RR-F3G	black	yes
P0704	8592920069851	25 m	1,5 mm ²	2	230 V~	16 A	IP44	H05RR-F3G	black	yes

Single socket extension cords with rubber-neoprene insulation

- high mechanical resistance of the rubber/neoprene insulation
- IP rating suitable for outdoor use
- high load capacities up to 16 A / 3 680 W for trouble-free power supply of a wide range of garden equipment
- available in different lengths for maximum flexibility in connection
- flexible cables with quality insulation are easy to coil, resist kinking and facilitate storage and frequent handling
- black colour, round socket with cover, children protection



P01825R
P01810
P01820
P01830
P01805
P01810R

General number	EAN	Length	Conductor cross-section	Number of sockets	Voltage	Current	Protection	Conductor	Cable colour	Children protection
P01825R	8592920064580	25 m	2,5 mm ²	1	230 V~	16 A	IP44	H07RN-F3G	black	yes
P01810	8592920011058	10 m	1,5 mm ²	1	230 V~	16 A	IP44	H07RN-F3G	black	yes
P01820	8592920011065	20 m	1,5 mm ²	1	230 V~	16 A	IP44	H07RN-F3G	black	yes
P01830	8592920011072	30 m	1,5 mm ²	1	230 V~	16 A	IP44	H07RN-F3G	black	yes
P01805	8592920064566	5 m	1,5 mm ²	1	230 V~	16 A	IP44	H07RN-F3G	black	yes
P01810R	8592920064573	10 m	2,5 mm ²	1	230 V~	16 A	IP44	H07RN-F3G	black	yes




OUTDOOR SOCKETS

We offer reliable solutions for safe power supply in outdoor environments - sockets with moisture- and dust-proof protection that are ideal for gardens, patios or workshops. For maximum convenience, you can choose between a remote-controlled version or one with a button for easy manual switching. Thanks to their robust construction and quality materials, our sockets can withstand adverse weather conditions and ensure long-lasting functionality.



Remote-controlled sockets

- convenient remote control of the sockets with a remote controller for maximum convenience
- durable IP44 rating protects against water, dust and harsh conditions
- elegant black design fits any exterior
- easy installation, quick connection and trouble-free operation

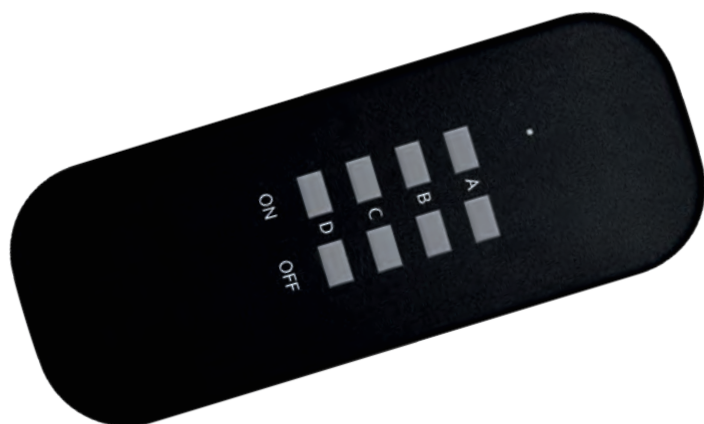

P0068

General number	EAN	Max. load	Number of sockets	Voltage	Current	Protection	Material	Colour	Children protection
P0068	8592920073001	3 000 W	1× 2P + PE	250 V~	13 A	IP44	plastic	black	yes


Socket with switch

- manual operation via a button on the socket
- durable IP44 rating protects against water, dust and harsh conditions
- easy installation, quick connection and trouble-free operation
- ideal for controlling garden pumps, irrigation systems, light decorations or work tools



P00292

General number	EAN	Max. load	Number of sockets	Voltage	Current	Protection	Material	Colour	Children protection
P00292	8592920078242	3 680 W	1× 2P + PE	250 V~	16 A	IP44	plastic	black	yes



In the Automation & Safety category, you will find smart and practical solutions to make your daily life easier, make your home safer and bring more comfort to your garden. From automatic lighting and irrigation control to reliable monitoring and protection, our products combine modern technology with simple installation and intuitive operation. These intelligent helpers will not only make working in the garden safer, but also more efficiently controlled and energy-efficient.


AUTOMATION AND SAFETY

1. Timers
2. Motion sensors
3. Water timers
4. Doorbells
5. Cameras
6. Valve closers



TIMERS

Timer sockets are ideal for automating various devices in your garden. We offer both analogue and Smart versions with an integrated power meter that can be connected to the GoSmart system. These sockets allow you to set timed schedules for switching equipment on and off, saving energy and increasing convenience.

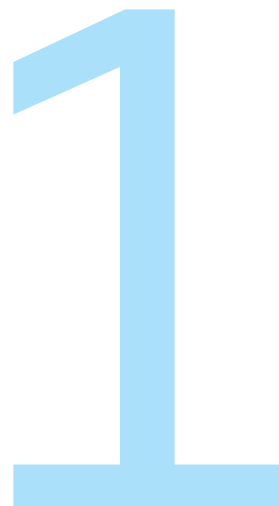

Timers

- automatic switching of appliances according to set time intervals for maximum convenience and energy savings
- high load capacity allows control a wide range of the most demanding garden appliances
- wide operating temperature range (-25 °C to +50 °C) guarantees reliable functionality in all seasons
- ideal for automatic switching on and off of garden lights, switching on irrigation systems, operating fountains and ponds, or controlling the heating of greenhouses



P5526N



P5525N

General number	EAN	Type	Voltage/Current	Max. load	Switching time	Number of switching per day	Manual switching	Protection	Dimension in mm	Children protection
P5526N	8592920117910	mechanical	230 V~/16 A max.	3 680 W	30 minutes	48	no	IP44	58 × 128 × 87	yes
P5525N	8592920134818	digital	230 V~/16(2) A max.	3 680 W	1 minute	10	yes	IP44	86 × 63 × 136	yes



GoSmart Sockets



- switch appliances on and off remotely using a mobile phone
- automate the operation of connected devices
- energy-saving and real-time consumption monitoring for efficient use of electricity
- timer function allows precise settings without the need for manual intervention
- child lock for maximum safety and protection
- smart memory restores the last power on or off status of the device in the event of a electricity outage
- connectivity via Wi-Fi or Zigbee protocol



P5532

P5534

General number	EAN	Product	Voltage/Current	Max load	Max. number of sockets per Wi-Fi network	Number of switching per day	Number of programs	Dimension in mm	Children protection
P5532	8592920122495	Wi-Fi timer /wattmeter-outside	230 V~/16 A max.	3 680 W	15	30	30	58 × 91 × 58	yes
P5534	8592920131817	ZigBee socket	230 V~/16 A max.	3 680 W	-	30	30	55 × 74 × 55	yes





MOTION SENSORS

Motion sensors are a great addition to any garden. Our sensors detect even the slightest movement and automatically turn on lights, making them ideal for entry doors, gates, pathways or garages. This increases security and saves energy at the same time, as the lights only come on when needed.



PIR motion sensors


- automatic switching of the lights provides convenience, safety and energy savings
- wide detection angle covers a large area and reacts reliably to movement
- high load capacity allows connection of different types of lighting
- adjustable sensitivity and switching time adapt the sensor to individual needs



G1120




G1125

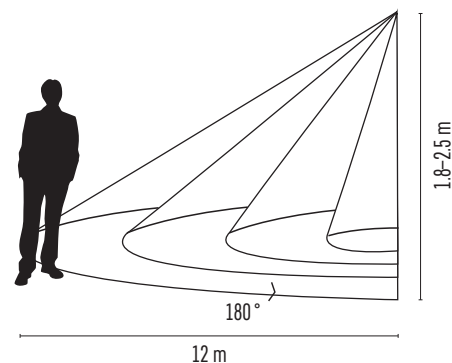

G1240

General number	EAN	Colour	Detection angle	Detection range	Switching time	Protection	Power supply	Dimension in mm
G1120	8592920032817	white	180°	12 m	min. 10 seconds - max. 15 minutes	IP44	230 V~/50 Hz	85 × 75 × 85
G1125	8592920032831	black	180°	12 m	min. 10 seconds - max. 15 minutes	IP44	230 V~/50 Hz	85 × 75 × 85
G1240	8592920085882	white	180°	12 m	min. 10 seconds - max. 15 minutes	IP65	230 V~/50 Hz	75 × 65 × 65

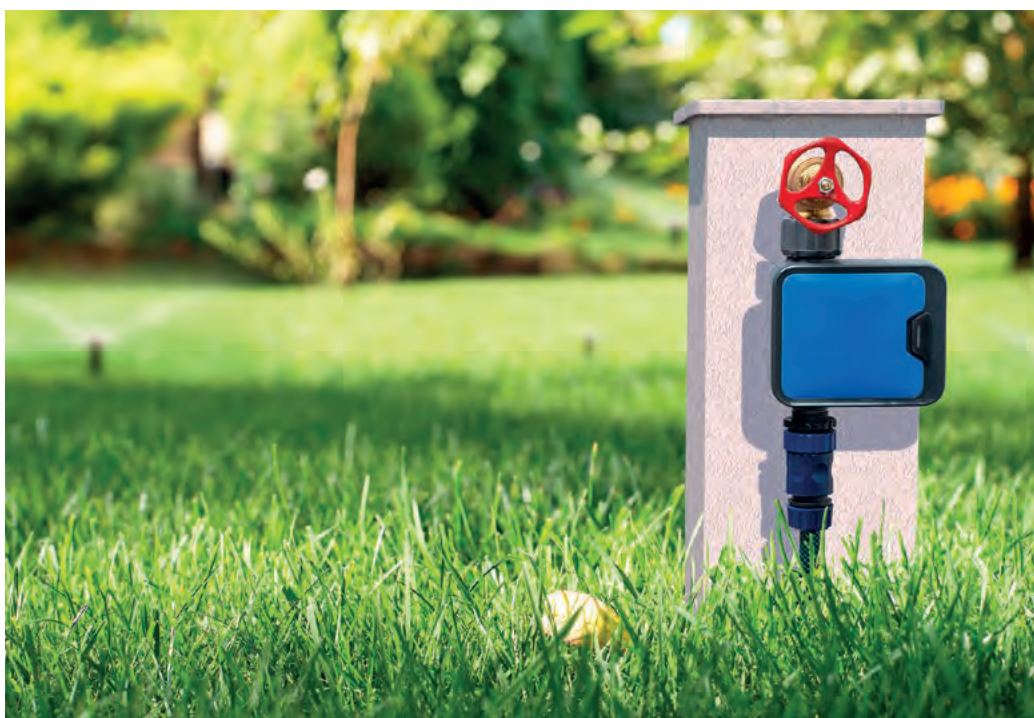

WATER TIMERS

Maximum control over garden watering, whether you prefer manual settings or smart automatic control. These practical helpers will be appreciated by anyone who wants to save time, water and energy while ensuring optimal plant care.

3

Manual and GoSmart Water timers

- smart control from anywhere for GoSmart water timers
- set watering schedule according to daily needs and current weather conditions
- delayed watering function on Smart models - saves water and prevents unnecessary overwatering of plants
- easy installation and intuitive operation
- saves time, money and energy



PW56001



PW56201



PW56202



Rain delay



Schedule



8 bar max.



Irrigation history




35 l/min max.



IP54



General number	EAN	Operating water pressure	Maximum flow rate	Irrigation frequency	Irrigation duration	Protection	Power supply	Dimension in mm
PW56001	8592920141717	0,5-8 bar	35 l/min	1 - 2 - 3 - 4 - 5 - 6 - 8 - 12 - 24 - 48 - 72 hours - 1 week	3 - 5 - 10 - 15 - 20 - 30 - 45 - 60 - 90 - 120 min	IP54	2× 1,5 V AA (not included)	140 × 155 × 75
PW56201	8592920141731	0,5-8 bar	35 l/min	no limit	1 minute - 24 hours	IP54	4× 1,5 V AA (not included)	120 × 160 × 55
PW56202	8592920141755	0,5-8 bar	35 l/min	no limit	1 minute - 24 hours	IP54	4× 1,5 V AA (not included)	135 × 160 × 70

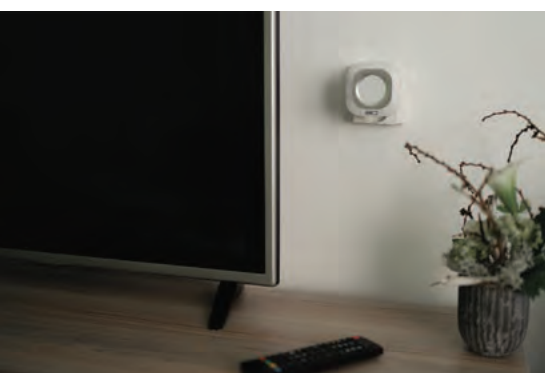

DOORBELLS

Wireless doorbells are a practical solution for every home. We offer both analogue and Smart versions that can be easily integrated into the entire EMOS GoSmart system. These doorbells provide reliable visitor signalling, whether you are at home or in your garden.



Wireless doorbells

- quick and easy set-up thanks to automatic pairing in seconds
- extended range on selected models with integrated signal extender
- flexible use with variants including a push button for convenient operation
- individual customisation with the ability to adjust the volume to suit your needs
- optical signalling ensures that the doorbell is not overheard even in noisy environments
- wide selection of melodies enables you to customise the sound to your preference



General number	EAN	Button range	Number of melodies	Special features	Optical signalling on the doorbell	Max. ringtone volume	Number of buttons in the package	Doorchime dimension in mm	Button dimension in mm
P5705	8595025363589	60 m	1	-	yes	75 dB	1	73 × 65 × 120	23 × 93 × 34
P5727	8592920067130	150 m	36	-	-	85 dB	1	67 × 65 × 105	22 × 85 × 38
P5729	8592920080405	180 m	36	battery-free button	yes	90 dB	1	73 × 81 × 81	22 × 49 × 82
P5760	8592920057582	120 m	16	USB output - 2 A, repeater function - allows you to extend the range of the button by a few hundred metres	yes	85 dB	1	66 × 63 × 110	16 × 101 × 39
P5760N	8592920140932	180 m	16	USB C output - PD 20W, repeater function - allows you to extend the range of the button by several hundred extra meters	yes	85 dB	1	66 × 63 × 110	16 × 101 × 39
P5750	8592920096963	150 m	10	battery-free button	yes	110 dB	1	66 × 67 × 107	24 × 90 × 40
P5731	8592920084304	180 m	36	battery-free button	yes	90 dB	1	73 × 81 × 81	22 × 49 × 82

Wireless doorbells odstranit



General number	EAN	Button range	Number of melodies	Special features	Optical signalling on the doorbell	Max. ringtone volume	Number of buttons in the package	Doorchime dimensions in mm	Button dimensions in mm
P5750.2T	8592920096987	150 m	10	battery-free button	yes	110 dB	2	66 × 57 × 107	24 × 90 × 40
P5750.2R	8592920096949	150 m	10	battery-free button	yes	110 dB	1	66 × 57 × 107	24 × 90 × 40
P5729B	8592920105948	180 m	36	battery-free button	yes	90 dB	1	73 × 73 × 81	22 × 49 × 82
P5733W	8592920105962	150 m	36	distinctive optical ringing indication	yes	110 dB	1	74 × 74 × 74	17 × 40 × 60
P5733S	8592920105986	150 m	36	distinctive optical ringing indication	yes	110 dB	1	74 × 74 × 74	17 × 40 × 60
P5733G	8592920106006	150 m	36	distinctive optical ringing indication	yes	110 dB	1	74 × 74 × 74	17 × 40 × 60
P5734	8592920112793	150 m	10	-	yes	85 dB	1	72 × 42 × 42	19 × 38 × 92
P5734B	8592920112809	150 m	10	-	yes	85 dB	1	72 × 42 × 42	19 × 38 × 92
P5737	8592920147573	150 m	36	-	yes	90 dB	1	90 × 85 × 75	82 × 40 × 20

Wireless battery-powered doorbells

- quick and easy set-up thanks to automatic pairing in seconds
- extended range on selected models with integrated signal extender
- flexible use with variants including a push button for convenient operation
- individual customisation with the ability to adjust the volume to suit your needs
- optical signalling ensures that the doorbell is not overheard even in noisy environments
- wide selection of melodies enables you to customise the sound to your preference



P5712



P5728



P5763
P5763N



P5763R
P5763RN



P5723

General number	EAN	Button range	Number of melodies	Special features	Optical signalling on the doorbell	Max. ringtone volume	Number of buttons in the package	Doorchime dimension in mm	Button dimension in mm
P5712	8595025377876	100 m	16	-	yes	80 dB	1	30 × 70 × 110	23 × 93 × 34
P5728	8592920080382	180 m	52	-	yes	90 dB	1	26 × 81 × 81	19 × 42 × 72
P5763	8592920057599	120 m	16	repeater function - allows you to extend the range of the button by a few hundred metres extra	yes	85 dB	1	34 × 65 × 116	15 × 101 × 39
P5763N	8592920140963	180 m	16	repeater function - allows you to extend the range of the button by a few hundred metres extra	yes	85 dB	1	34 × 65 × 116	15 × 101 × 39
P5763R	8592920057612	120 m	16	repeater function - allows you to extend the range of the button by a few hundred metres extra	yes	85 dB	-	34 × 65 × 116	-
P5763RN	8592920140994	180 m	16	repeater function - allows you to extend the range of the button by a few hundred metres extra	yes	85 dB	-	34 × 65 × 116	-
P5723	8592920006641	100 m	36	-	-	75 dB	1	29 × 72 × 125	23 × 93 × 34

Wireless battery-powered doorbells



P5736

P5730

General number	EAN	Button range	Number of melodies	Special features	Optical signalling on the doorbell	Max. ringtone volume	Number of buttons in the package	Doorchime dimension in mm	Button dimension in mm
P5730	8592920084281	180 m	52	-	yes	90 dB	1	26 × 81 × 81	19 × 42 × 72
P5736	8592920147566	150 m	36	-	yes	90 dB	1	90 × 85 × 32	82 × 40 × 20

GoSmart Wireless doorbells



- monitor your ringtones via mobile phone notifications
- automatic pairing of button and bell
- convenient control and setup of the doorbell via mobile app
- expandable to accommodate up to 2 outdoor buttons for versatile placement
- modern design in white and metallic
- creation of smart scenarios and the possibility of automation with other GoSmart products



P5735SS



P5735WS

General number	EAN	Button range	Number of melodies	Special features	Optical signalling on the doorbell	Max. ringtone volume	Number of buttons in the package	Doorchime dimension in mm	Button dimension in mm
P5735WS / P5735SS	8592920135488 / 8592920135433	150 m	52	different melody and volume settings for each button	yes	110 dB	1	80 × 80 × 65	19 × 38 × 92



IP CAMERAS

Secure your home and garden with our high-end EMOS IP outdoor cameras. These cameras offer high resolution recordings, providing a clear and detailed view of your outdoor space. With advanced features such as night vision, motion detection and remote access via mobile app, you can have peace of mind that your property is always under surveillance. All of our cameras are part of the GoSmart system, allowing them to be easily managed via your phone and linked to other products in the system.




GoSmart Camera IP-600 EYE

- waterproof body for the harshest climates
- battery operation recharged by an integrated solar panel
- siren for even better protection system
- two-way voice communication



H4056



GoSmart Camera IP-800 WASP

- PTZ (pan tilt and zoom) function to ensure comprehensive coverage of the surveillance area
- siren for an even better protection system
- colour recording even at night
- motion tracking function where the camera automatically tracks a moving object and returns to its original position when it disappears



H4057



GoSmart Camera IP-600 OWL

- connectivity via 4G mobile network
- powered by a solar panel and large capacity battery
- 3MPx camera resolution for high quality images and reasonable data consumption
- PTZ (pan tilt zoom) - pan and zoom the camera as needed and monitor a much larger area than with a Camera trap



GoSmart IP-210 SNAP Camera

- waterproof camera for indoor and outdoor security
- long operating life thanks to premium battery capacity
- two supplied mounts for easy and quick installation (magnetic + mechanical mount)
- human body detection
- two-way voice communication



GoSmart Camera IP-310 TORCH W/B



- 2 in 1 waterproof security camera and elegant lighting
- full HD image resolution and camera rotation in one axis
- built-in security siren with up to 120 dB volume
- possibility to change the light intensity
- motion detection zone adjustment
- motion detection and tracking



General number	EAN	Power supply for camera	Installation	Night vision	Special features	Protection	Detection angle/range	Dimension in mm
H4056	8592920117743	4×18650 battery 2 200 mAh + solar panel + DC adapter 5 V/1 A (included)	wall mounted	yes	motion detection, siren, night vision	IP55	120° / 10 m	235 × 140 × 100
H4057	8592920128909	DC 5 V/1 A (included)	wall mounted	yes	motion detection, sound detection, siren, night vision	IP65	110° / 10 m	12 × 86 × 94
H4058	8592920128923	Li-ion battery 10 400 mAh + solar panel + DC 5 V/1 A adapter (included)	wall mounted	yes	motion detection, siren, night vision	IP65	120° / 10 m	75 × 200 × 150
H4063	8592920129012	Li-ion battery 9 600 mAh + DC 5 V/1 A adapter (included)	wall mounted/standing	yes	motion detection, night vision	IP65	120° / 9 m	58 × 58 × 94
H4064	8592920129036	AC 100~240 V	wall mounted	yes	motion detection, siren	IP65	120° / 10 m	74 × 131 × 260
H4065	8592920129050	AC 100~240 V	wall mounted	yes	motion detection, siren	IP65	120° / 10 m	74 × 131 × 260




VALVE CLOSER

Perfect control over irrigation and water safety in your garden. Modern technology allows automatic or remote control of the main valve, minimising the risk of unwanted water waste or leakage accidents. Thanks to compatibility with smart apps, you can conveniently control the valve via your mobile phone, schedule timed watering or connect it to other smart devices.





GoSmart Motorised ZigBee Water/Gas Valve Closer



- automatic and manual control in case of electricity outage
- high power and torque
- immediate response to fault detection in case of full automation
- ideal as a complement to a GoSmart water leak detector or smoke detector
- compatible with closers that close/open with 90° rotation




P5640S

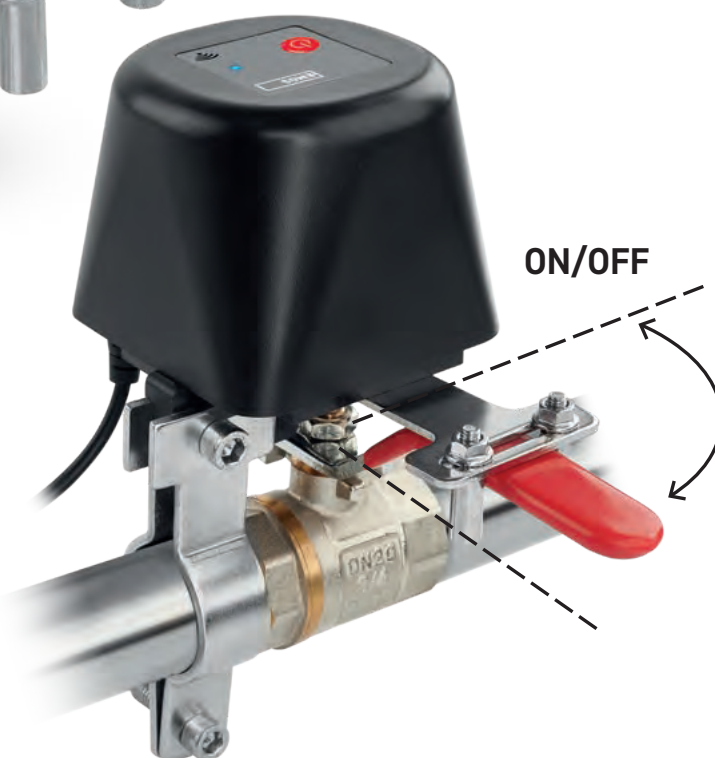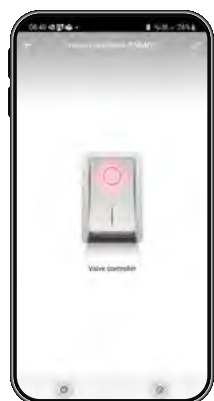

ON/OFF

General number	EAN	Pipe diameter	Torque	Operating temperature	Power supply	Protection	Dimension in mm
P5640S	8592920126202	1/2", 3/4", 1" a 1 1/4"	max. 5.88 Nm	-10 °C up to 55 °C	DC 12 V/1000 mA, 1.4 m (included)	IP20	70 × 105 × 78



Whether you need a quick fix or a tight connection, garden tape is a versatile tool for every situation. They are designed to withstand moisture, temperature fluctuations and mechanical stress, so you can use them not only in the garden, but also when maintaining pools, greenhouses, irrigation systems or outdoor equipment. In our portfolio you will find a wide range of tapes to meet the requirements of both professionals and DIYers. We offer insulation, pool, greenhouse and fabric tapes, as well as vulcanizing, demarcation or reflective tapes for safety marking. Foam and nano double-sided tapes serve for strong joints, while acrylic and window tapes provide long-lasting insulation.

FIRST AID FOR THE GARDEN

1. Tapes



TAPES

Using a variety of tapes in the garden can greatly simplify many tasks and projects. We offer a wide range of tapes in different types, shapes and colours to help you tackle any task in your garden with ease. Whether you need solid tape for repairs or specialty tape for specific projects, we have the right solution for you.

- Insulating PVC Tape
- Hobby tapes
- Acrylic tapes
- NANO tapes
- Repair tapes
- Vulcanizing tapes
- Duct Tape Tapes
- Double-sided tapes
- Marking tapes



PVC insulation tapes



- high durability protects against moisture, dust and mechanical damage
- excellent insulation ensures safe conduction of electric current
- thanks to their strong adhesion, they are suitable for various types of surfaces
- flexible material easily adapts to the shape of conductors and joints
- suitable for use in a wide temperature range
- resistant to ageing and UV radiation
- non-flammable material minimises the risk of fire
- wide range of colours for easy marking of wires and cables
- ideal for repairing and insulating garden wiring, colour coding garden features, tying plants and trees, temporary fixing of materials



General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Electrical strength	Installation temperature range	Adhesive material
F61511	8595025342317	white	15 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61512	8595025342324	black	15 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61513	8595025342331	red	15 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61517	8595025342379	brown	15 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61590	8592920141182	mix of colours	15 mm	8 m	yes	yes	2,5 kV/mm	0-80 °C	rubber
F615992	8592920091449	mix of colours	15 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61514	8595025342348	blue	15 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61519	8592920055052	green	15 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61515	8595025342355	green/yellow	15 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61516	8595025342362	yellow	15 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber

Insulating PVC tapes



F61921

F61922

F61923

F61924

F61925

F61926

F61927

F61929

F62512


F61912

F61999

General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Electrical strength	Installation temperature range	Adhesive material
F61921	8595025342393	white	19 mm	20 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61922	8595025342409	black	19 mm	20 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F62512	8595025342461	black	25 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61923	8595025342416	red	19 mm	20 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61927	8592920056233	brown	19 mm	20 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61912	8595025342386	black	19 mm	10 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61999	8592920091425	mix of colours	19 mm	20 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61924	8595025342423	blue	19 mm	20 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61929	8595025342454	green	19 mm	20 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61925	8595025342430	green/yellow	19 mm	20 m	yes	yes	40 kV/mm	-25-90 °C	rubber
F61926	8595025342447	yellow	19 mm	20 m	yes	yes	40 kV/mm	-25-90 °C	rubber

Pool tapes

- high adhesion under water without draining the pool
- high UV resistance when exposed to sunlight
- resistant to high and low temperatures
- suitable for various types of materials, including PVC pool liners
- very easy to install
- ideal for quick repairs of swimming pools, ponds, rain barrel and barrel seals, inflatable mattresses or swimming aids

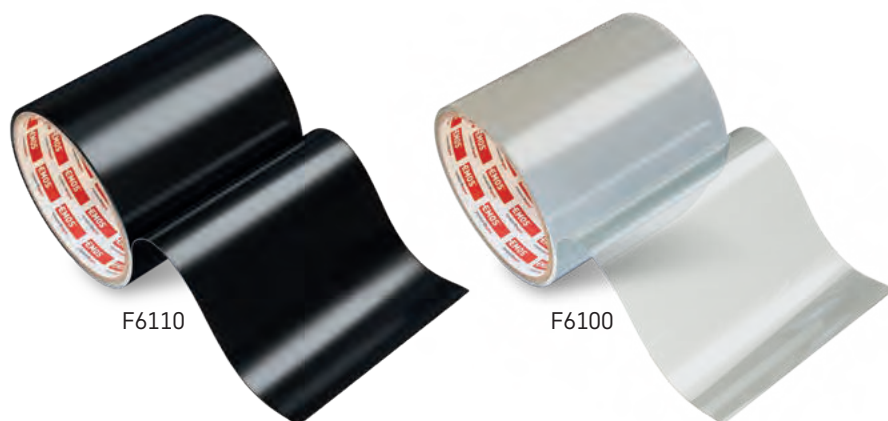

General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Installation temperature range	Adhesive material
F6100	8592920135327	transparent	100 mm	1 m	yes	yes	-25-90 °C	synthetic adhesive
F6110	8592920136638	black	100 mm	1 m	yes	yes	-25-90 °C	synthetic adhesive

Greenhouse tape

- highly adhesive
- resistant to rain, wind and extreme temperatures
- transparent design for unobtrusive repairs without compromising the appearance of greenhouses
- easy to install on smooth and uneven surfaces including polycarbonate and glass
- compact tape size for larger repairs
- high quality tape material ensures a strong and durable bond for a long time
- ideal for repairs to greenhouses, windows, sheds, greenhouses and greenhouses and other transparent surfaces



General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Installation temperature range	Adhesive material
F6200	8592920135532	transparent	50 mm	25 m	not applicable	yes	-25-90 °C	acrylic

Textile tapes

- versatile use for reinforcing, repairing, sealing and binding materials
- asphalt textile tapes with long life and strength
- reliable protection against moisture, rain and sunlight
- suitable for mechanically stressed joints and surfaces; for small electrical installations
- stable flexibility even under heavy use
- easy unwinding, tearing and application on various materials
- ideal for reinforcing cracked garden tool handles, fixing and tying cables and hoses, gently attaching plants and trees to stakes without damaging bark or stems, wrapping sharp edges of surfaces



General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Installation temperature range	Adhesive material
F6910	8595025311566	black	19 mm	10 m	no	yes	5-40 °C	asphalt
F6515	8595025311177	black	15 mm	15 m	no	yes	5-40 °C	asphalt

Marking tapes


- highly visible thanks to red and white hatching, instantly recognisable even in low visibility
- weatherproof
- practical cardboard unwrapper prevents tangling and facilitates handling
- lightweight and strong material for long life
- ideal for marking garden beds, paths or work areas





General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Installation temperature range	Adhesive material
F87525	8592920023662	red/white	75 mm	250 m	no	yes	5-30 °C	without adhesive

Foam double-sided tape

- provides a strong and permanent bond between different materials
- thanks to its foam structure, the tape is able to adapt to uneven surfaces
- effectively absorbs shock and vibration, making it ideal for sensitive applications
- resistant to moisture and chemicals
- easy to install
- ability to withstand high temperatures without loss of adhesion
- allows clean and invisible joints, suitable for decorative and design applications
- ideal for attaching garden decorations, solar lights, ornaments and other smaller items to various surfaces, attaching signs or signs, attaching garden tool holders to walls or fences

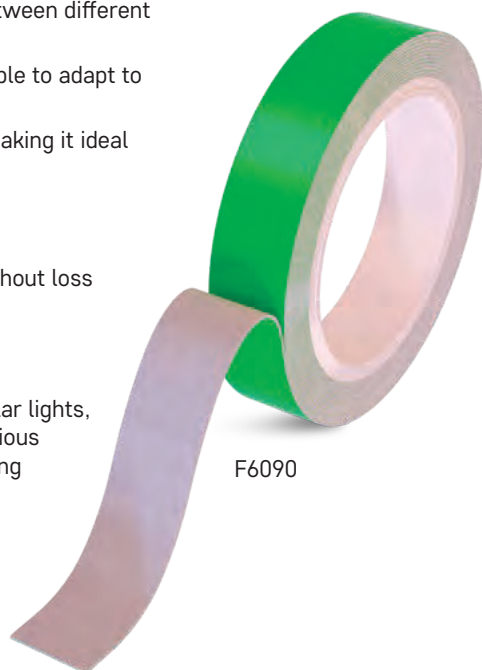

F6090

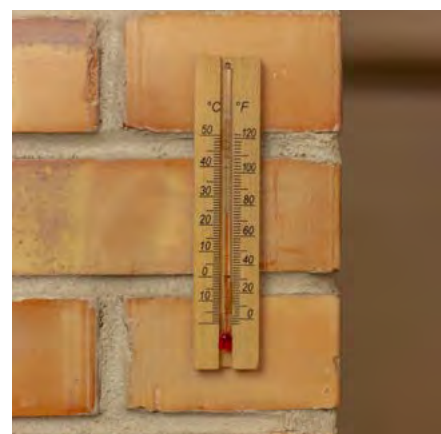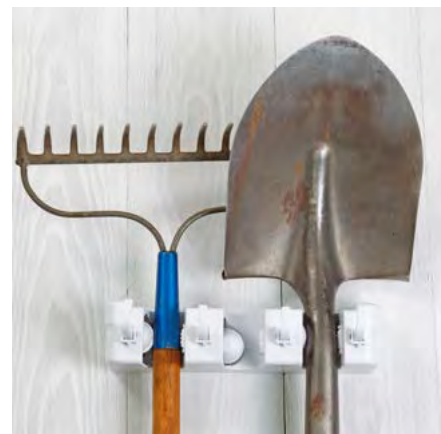

General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Installation temperature range	Adhesive material
F6090	8592920136195	white	20 mm	3 m	no	not applicable	5-80 °C	acrylic

Nano double-sided tape

- suitable for a variety of surfaces including wood, glass and metal
- innovative gel material provides high strength and flexibility
- reusable after rinsing with lukewarm water
- leave no residue after removal
- ideal for attaching garden decorations, solar lights, quick repairs to cracked or damaged garden furniture, fixing hoses or irrigation system pipes to walls or other surfaces



F6300


F6301



General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Installation temperature range	Adhesive material
F6300	8592920136201	transparent	30 mm	3 m	not applicable	not applicable	5-80 °C	acrylic
F6301	8592920147184	transparent	19 mm	3 m	not applicable	not applicable	5-80 °C	acrylic

Acrylic double-sided tapes



- acrylic adhesive provides long life and solvent resistance
- provide a strong and permanent bond
- resists high temperatures and UV rays, ensuring their longevity
- hand pressure is sufficient to create a quality bond without the need for special tools
- extreme adhesion to all surface irregularities
- ideal for attaching bird or insect screens, attaching wireless bells, decorative elements, attaching garden hose holders

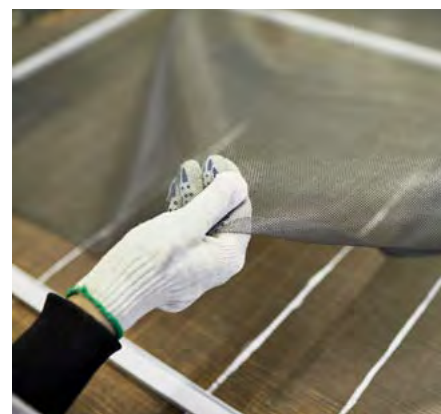

General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Installation temperature range	Adhesive material
F6060	8592920033975	transparent	12 mm	3 m	not applicable	yes	5-40 °C	acrylic
F6080	8592920052860	transparent	18 mm	3 m	not applicable	yes	5-40 °C	acrylic

Reflective tapes


- strongly reflects light back to the source, making them easily recognisable even in low visibility
- reflective elements can make an object or person visible at distances of up to 200 metres
- self-adhesive and flexible for easy application on a variety of surfaces
- available in silver, yellow, orange and red
- ideal for marking garden paths and walkways, safety markings on items such as garden furniture, marking garden beds, marking safety features on fences

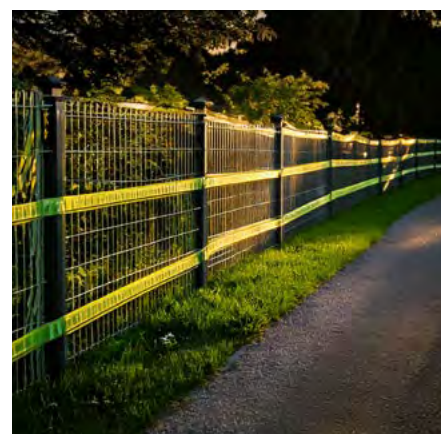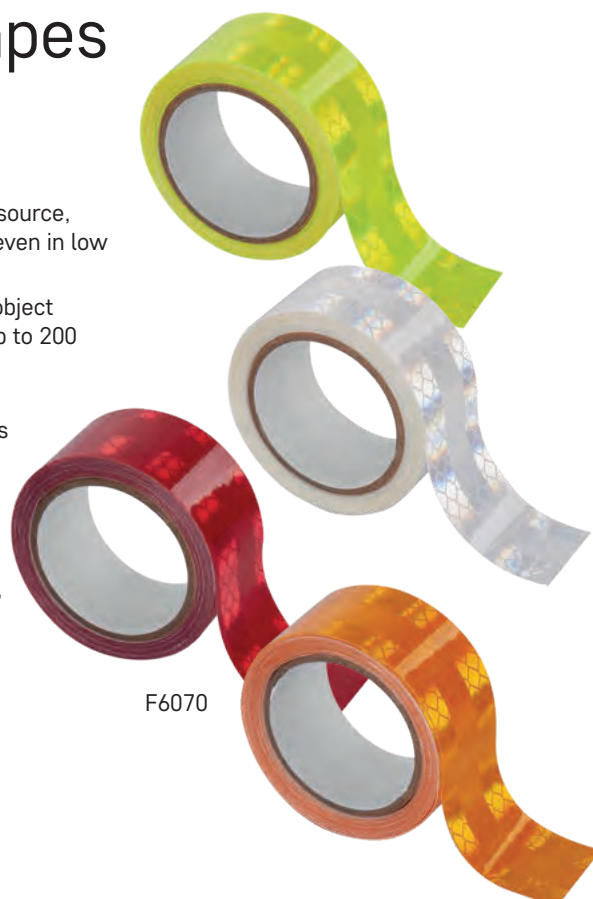

General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Installation temperature range	Adhesive material
F6070	8592920041055	mix of colours	25 mm	2 m	not applicable	yes	-25-90 °C	rubber

Insect net repair tape

- a quick and effective solution for repairing cracks in window screens
- designed to allow sufficient air circulation
- provides firm support for torn materials
- reliable adhesion to the damaged surface over a long period of time
- suitable for repairing all types of mosquito nets, tears in nets on gazebos and pergolas, chicken coops and insect screens on windows, balconies and doors

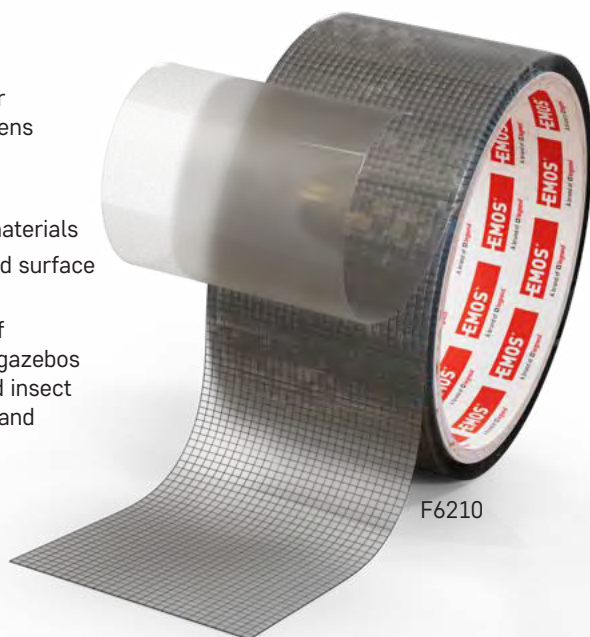

F6210



General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Installation temperature range	Adhesive material
F6210	8592920147207	transparent	50 mm	2 m	not applicable	yes	5-80 °C	hot melt

Duct Tapes

- suitable for emergency repairs and installations indoors and outdoors
- easy to tear by hand without the need for scissors
- resistant to moisture, sun and temperature changes
- flexible for use on a variety of surfaces, including pipes, insulation, sails and tents
- ideal for quick repairs to garden furniture, fixing garden hoses, repairing tarpaulins and tents, repairing garden tools, repairing damaged parts of fences or gates



F6030



F6302




General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Installation temperature range	Adhesive material
F6030	8592920036082	silver	48 mm	10 m	not applicable	yes	5-80 °C	synthetic rubber
F6302	8592920147160	transparent	48 mm	10 m	not applicable	no	5-80 °C	hot melt

Vulcanizing tapes


- provide a waterproof joint, ideal for repairing pipes, hoses
- provide high electrical insulation
- the tapes shrink themselves and perfectly wrap around the covered repair area
- suitable for repairing electrical cables, pressure hoses, pipes and other surfaces with cracks
- silicone version for extreme conditions also available



F52503

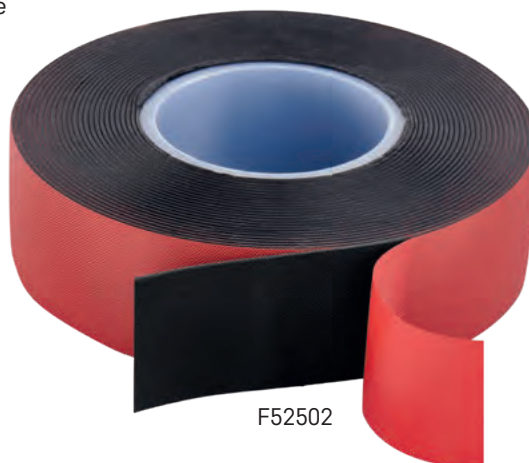

F52502

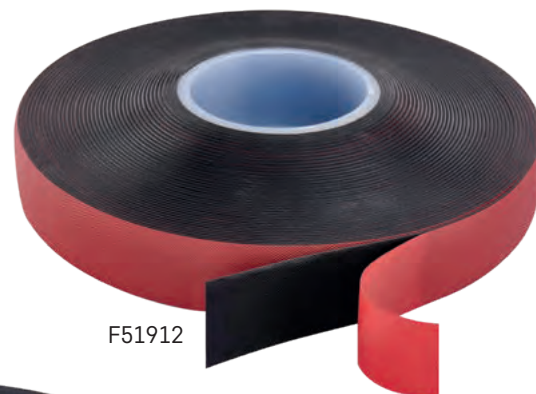

F51912

General number	EAN	Tape colour	Tape width	Tape length	Waterproof joint	UV resistance	Electrical strength	Installation temperature range
F51912	8595025361554	black	19 mm	10 m	yes	not applicable	14 kv/mm	5-95 °C
F52502	8595025361561	black	25 mm	5 m	yes	not applicable	14 kv/mm	5-95 °C
F52503	8592920033753	black	25 mm	3 m	yes	yes	8 kv/mm	-60-260 °C





LIGHTING



FIRST AID FOR THE GARDEN

AUTOMATION AND SAFETY



POWER SUPPLY AND CONNECTION



EMOS spol. s r.o.
Lipnická 2844
750 02 Přerov
e-mail: emos@emos.cz
telefon: +420 581 261 111

www.emos.eu

Making Life Easy